

# TB1-4G (Optional 4G) Multimedia Player



Specifications

## Change History

Document Version	Release Date	Description
V2.1.1	2024-09-27	<ul style="list-style-type: none"> <li>• Updated the product specifications.</li> <li>• Updated the media decoding specifications.</li> </ul>
V2.1.0	2024-07-24	<ul style="list-style-type: none"> <li>• Updated the feature description.</li> <li>• Updated the RUN indicator description.</li> <li>• Added the recommended supply power.</li> <li>• Updated the packing information.</li> <li>• Updated the media decoding specifications.</li> </ul>
V1.9.0	2024-05-30	<ul style="list-style-type: none"> <li>• Updated the introduction.</li> <li>• Updated the feature descriptions.</li> <li>• Updated the connector descriptions.</li> <li>• Updated media decoding specifications.</li> </ul>
V1.8.4	2023-10-16	Updated the description of the default Wi-Fi AP password.
V1.8.3	2023-06-14	<ul style="list-style-type: none"> <li>• Updated the description of the Wi-Fi feature.</li> <li>• Deleted the antenna dimension diagram.</li> <li>• Added the gross weight of the product.</li> </ul>
V1.8.2	2022-11-18	Updated the certification information.
V1.8.1	2022-06-10	<ul style="list-style-type: none"> <li>• Updated the certification information.</li> <li>• Updated the indicator descriptions.</li> <li>• Updated the accessory descriptions.</li> </ul>
V1.8.0	2022-03-30	<ul style="list-style-type: none"> <li>• Added certification information.</li> <li>• Updated the appearance pictures.</li> </ul>
V1.7.1	2022-03-15	Added certification information and cautions.
V1.7.0	2021-06-28	Updated the front panel picture.

## Introduction

The TB1-4G (Optional 4G) is the second generation of multimedia player launched by NovaStar for full-color LED displays. This multimedia player integrates playback and sending capabilities, allowing for solution publishing and screen control via various user terminal devices such as PC, mobile phones and tablets. The TB1-4G (Optional 4G) also supports the cloud publishing and monitoring platforms to easily enable cross-regional cluster management of screens.

The TB1-4G (Optional 4G) supports USB playback, satisfying various playback demands. Multiple protection measures such as terminal authentication and player verification are taken to keep the playback secure.

Thanks to its security, stability, ease of use, smart control, etc., the TB1-4G (Optional 4G) widely applies to commercial display and smart cities such as lamp-post displays, chain store displays, advertisement players, retail store displays, door head displays, vehicle-mounted displays, and displays without requiring a PC.

## Certifications

CQC, SRRC

**If the product does not have the relevant certifications required by the countries or regions where it is to be sold, please contact NovaStar to confirm or address the problem. Otherwise, the customer shall be responsible for the legal risks caused or NovaStar has the right to claim compensation.**

## Features

### Output

- Loading capacity up to 650,000 pixels
  - Maximum width: 1920 pixels
  - Maximum height: 1080 pixels
- 1x Gigabit Ethernet port
- 1x Stereo audio output

### Control

- 1x USB 2.0 port allowing for USB playback and storage expansion
- 1x USB (Type B) port
  - Connecting this port to a PC allows users to configure screens, publish content, etc. with the supporting software.

### Performance

- Powerful processing capacity
  - Quad-core processor @1.2 GHz
  - Hardware decoding of 1080p videos
  - 1 GB of RAM
  - 32 GB of internal storage


### Functionality

- All-round control plans
  - Enables users to publish content and control screens from a computer, mobile phone, or tablet.
  - Allows users to publish content and control screens from anywhere, anytime.
  - Allows users to monitor screens from anywhere, anytime.
- Switching between Wi-Fi AP and Wi-Fi STA
  - In Wi-Fi AP mode, the user terminal connects to the built-in Wi-Fi hotspot of the TB1-4G (Optional 4G). The default SSID is “AP+*Last 8 digits of SN*” and the default password is printed on the SSID label of the product.

- In Wi-Fi STA mode, the user terminal and the TB1-4G (Optional 4G) are connected to the Wi-Fi hotspot of a router.
- Support for 4G modules
  - The TB1-4G (Optional 4G) ships without a 4G module. Users have to purchase 4G modules separately if needed.
  - Wired network is prior to 4G network. When both networks are available, the T1-4G (Optional 4G) will choose signals automatically according to the priority.


## Appearance

### Front Panel

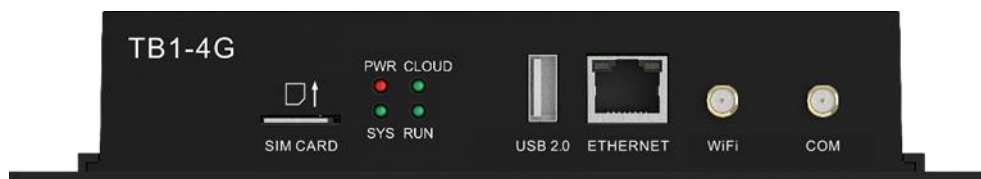

Name	Description
SIM CARD	SIM card slot Capable of preventing users from inserting a SIM card in the wrong orientation.
USB 2.0	USB 2.0 (Type A) port Allows for USB playback and storage expansion. Only the FAT32 file system is supported and the maximum size of a single file is 4 GB.
ETHERNET	Fast Ethernet port, connecting to a network or control PC
WiFi	Wi-Fi antenna connector (2.4 GHz Wi-Fi supported)
COM	4G antenna connector

### Rear Panel

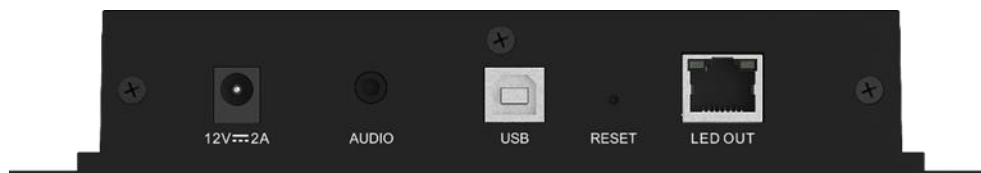

Name	Description
12V 2A	Power input connector
AUDIO	Audio output OMTP headphones can be connected.

Name	Description
USB	USB 2.0 (Type B) port
RESET	Factory reset button Press and hold this button for 5 seconds to reset the product to its factory settings.
LED OUT	Gigabit Ethernet output

## Indicators

Name	Color	Status	Description
PWR	Red	Staying on	The power supply is working properly.
SYS	Green	Flashing once every 2 seconds	The operating system is functioning normally.
		Staying on/off	The operating system is malfunctioning.
CLOUD	Green	Staying on	The Taurus is connected to the Internet and the connection is available.
		Flashing once every 2 seconds	The Taurus is connected to VNNOX and the connection is available.
		Flashing once every second	The Taurus is upgrading the operating system.
		Flashing once every 0.5 second	The Taurus is copying the upgrade package.
RUN	Green	Flashing once every 2s	The FPGA has no video source.
		Flashing once every 0.5 second	The FPGA is functioning normally.
		Staying on/off	The FPGA loading is abnormal.

## Applications

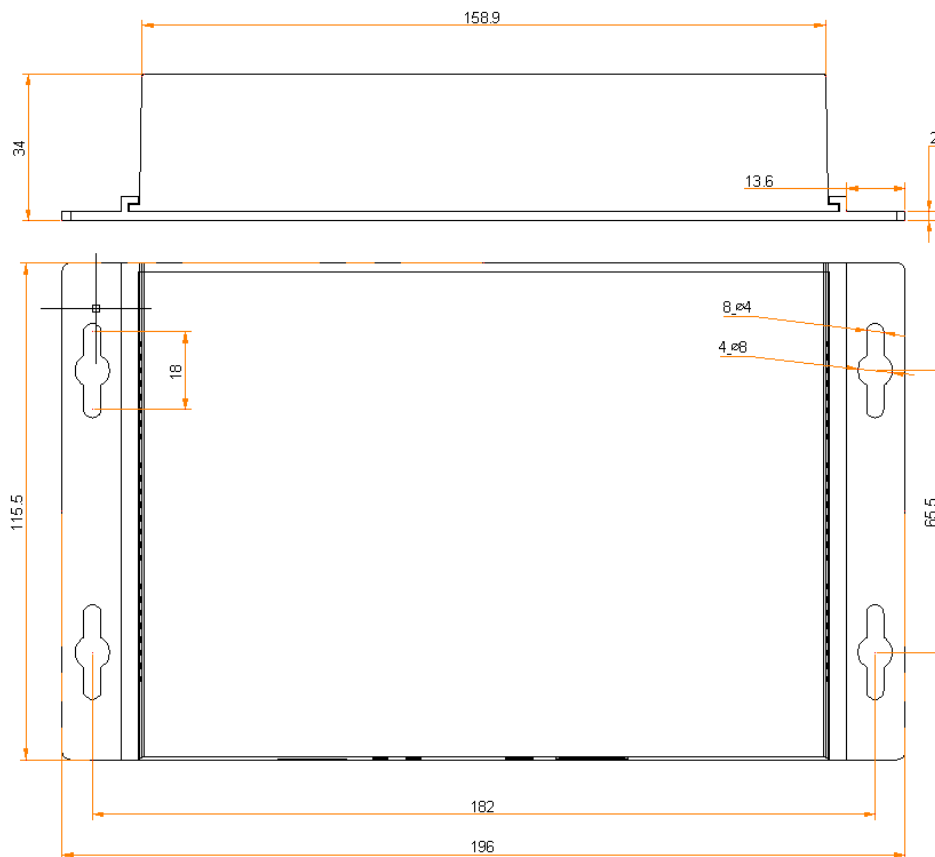
The Taurus series products widely apply to commercial display, such as lamp-post displays, chain store displays, advertisement players, mirror displays, retail store displays, door head displays, vehicle-mounted displays, and displays without requiring a PC.

Table 1-1 lists the application scenarios of the Taurus.

Table 1-1 Applications

Category	Description
Market type	<ul style="list-style-type: none"> <li>Advertising media: Used for advertisement and information promotion, such as lamp-post displays and advertisement players.</li> <li>Digital signage: Used for digital signage displays in retail stores, such as retail store displays and door head displays.</li> <li>Commercial display: Used for the display of business information of hotels, cinemas, shopping malls, etc., such as chain store displays.</li> </ul>
Networking method	<ul style="list-style-type: none"> <li>Single screen: Connect to and manage a screen by using a PC or mobile app.</li> <li>Multiple screens: Manage and monitoring multiple screens in a centralized manner by using the cluster solutions of NovaStar.</li> </ul>
Connection method	<ul style="list-style-type: none"> <li>Wired connection: The PC and Taurus are connected via Ethernet cable or LAN.</li> <li>Wi-Fi connection: The PC, tablet or mobile phone is connected to the Taurus via Wi-Fi. Working with the supporting software, the Taurus can apply to the scenarios where no PC is required.</li> </ul>

## Dimensions

Tolerance:  $\pm 0.3$  Unit: mm

## Specifications

Electrical Parameters	Input voltage	DC 5 V~12 V
	Maximum power consumption	18 W
	Recommended supply power	25 W
Storage Capacity	RAM	1 GB
	Internal storage	32 GB
Storage Environment	Temperature	-40°C to +80°C
	Humidity	0% RH to 80% RH, non-condensing
Operating Environment	Temperature	-20°C to +60°C
	Humidity	0% RH to 80% RH, non-condensing
Packing Information	Dimensions (L×W×H)	335 mm × 190 mm × 62 mm
	Accessories	<ul style="list-style-type: none"> <li>• 1x Wi-Fi omnidirectional antenna</li> <li>• 1x Power adapter</li> <li>• 1x Quick Start Guide</li> <li>• 1x Certificate of Approval</li> </ul>
Physical Specifications	Dimensions (L×W×H)	196.0 mm × 115.5 mm × 34.0 mm
	Net weight	301.8 g
	Gross weight	614.3 g
IP Rating	IP20 Please prevent the product from water intrusion and do not wet or wash the product.	
System Software	<ul style="list-style-type: none"> <li>• Android 5.1 operating system software</li> <li>• Android terminal application software</li> <li>• FPGA program</li> </ul> Note: Third-party applications are not supported.	

## Media Decoding Specifications

### Image

Codec	Max Resolution	Format	Remarks
JFIF file format 1.02	4096×2160 pixels	JPG, JPEG	No support for non-interlaced scan Support for SRGB JPEG

Codec	Max Resolution	Format	Remarks
			Support for Adobe RGB JPEG
BMP	4096×2160 pixels	BMP	N/A
GIF	4096×2160 pixels	GIF	N/A
PNG	4096×2160 pixels	PNG	N/A
WEBP	4096×2160 pixels	WEBP	N/A

## Audio

Codec	Channel	Bit Rate	Sampling Rate	Format	Remarks
MPEG1/2/2.5 Audio Layer1/2/3	2	8kbps~320kbps, CBR and VBR	8kHz~48kHz	MP1, MP2, MP3	N/A
WMA Version 4/4.1/7/8/9, wmapro	2	8kbps~320kbps	8kHz~48kHz	WMA	No support for WMA Pro, lossless and MBR
MS-ADPCM, IMA-ADPCM, PCM	2	N/A	8kHz~48kHz	WAV	Support for 4bit MS-ADPCM and IMA-ADPCM
Q1~Q10	2	N/A	8kHz~48kHz	OGG, OGA	N/A
Compress Level 0~8	2	N/A	8kHz~48kHz	FLAC	N/A
ADIF, ATDS Header AAC- LC and AAC- HE, AAC-ELD	5.1	N/A	8kHz~48kHz	AAC, M4A	N/A
AMR-NB, AMR-WB	1	AMR-NB 4.75~12.2kbps@8kHz  AMR-WB 6.60~23.85kbps@16kHz	8kHz, 16kHz	3GP	N/A
MIDI Type 0/1, DLS version 1/2, XMF and Mobile XMF, RTTTL/RTX, OTA, iMelody	2	N/A	N/A	XMF, MXMF, RTTTL, RTX, OTA, IMY	N/A



## Video

Codec	Resolution	Max Frame Rate	Max Bit Rate (Ideal Case)	Format	Remarks
MPEG-1/2	48×48 pixels to 1920×1080 pixels	30fps	80Mbps	DAT, MPG, VOB, TS	Support for Field Coding
MPEG4	48×48 pixels to 1920×1080 pixels	30fps	38.4Mbps	AVI, MKV, MP4, MOV, 3GP	No support for MS MPEG4 v1/v2/v3, GMC and DivX3/4/5/6/7.../10
H.264	48×48 pixels to 1920×1080 pixels	30fps	57.2Mbps	AVI, MKV, MP4, MOV, 3GP, TS, FLV	Support for Field Coding and MBAFF
H.264 MVC	48×48 pixels to 1920×1080 pixels	60fps	38.4Mbps	MKV, TS	Support for Stereo High Profile only
H.265/HEVC	48×48 pixels to 1920×1080 pixels	60fps	57.2Mbps	MKV, MP4, MOV, TS	N/A
VP8	48×48 pixels to 1920×1080 pixels	30fps	38.4Mbps	WEBM, MKV	N/A
H.263	SQCIF (128×96) QCIF (176×144) CIF (352×288) 4CIF (704×576)	30fps	38.4Mbps	3GP, MOV, MP4	No support for H.263+
MJPEG	48×48 pixels to 1920×1080 pixels	30fps	38.4Mbps	AVI	N/A

Note: The output data format is YUV420 semi-planar, and YUV400 (monochrome) is also supported for H.264.

## Notes and Cautions

This is Class A product. In a domestic environment, this product may cause radio interference in which case the user may be required to take adequate measures.

**Copyright © 2024 Xi'an NovaStar Tech Co., Ltd. All Rights Reserved.**

No part of this document may be copied, reproduced, extracted or transmitted in any form or by any means without the prior written consent of Xi'an NovaStar Tech Co., Ltd.

**Trademark**

 is a trademark of Xi'an NovaStar Tech Co., Ltd.

**Statement**

Thank you for choosing NovaStar's product. This document is intended to help you understand and use the product. For accuracy and reliability, NovaStar may make improvements and/or changes to this document at any time and without notice. If you experience any problems in use or have any suggestions, please contact us via the contact information given in this document. We will do our best to solve any issues, as well as evaluate and implement any suggestions.

| [Official website](http://www.novastar.tech)  
| [www.novastar.tech](http://www.novastar.tech)

| [Technical support](mailto:support@novastar.tech)  
| [support@novastar.tech](mailto:support@novastar.tech)